

SUZI-COILS

Electrical suzi-coils manufactured with V75 inner sheath and formed with a nylon outer sheath. Coil diameters approximate standard air suzi-coil diameters to reduce abrasion. Smaller coil diameters can greatly accelerate rubbing through of air and electrical coils posing a braking and/or fire hazard. When selecting a suzi-coil the current rating is determined by the current capacity of the earth/ground return conductor/core alone. See our molded suzi coils rated for extreme duty.

Heavy duty - 4mm auto 7 core short-tail



● Complies with AS2218

● Cable O.D: 8.8mm ● Coil O.D. 127mm ● Working length: 3.5M ● Total cable length: 5M ● 100VDC or 32VAC@15A max.



CS47


Unplugged short-tail coil.



CS47P

Plugged short-tail coil with 7pin D.I.N. metal truck plugs.

Heavy duty - 4mm auto 7 core long-tail

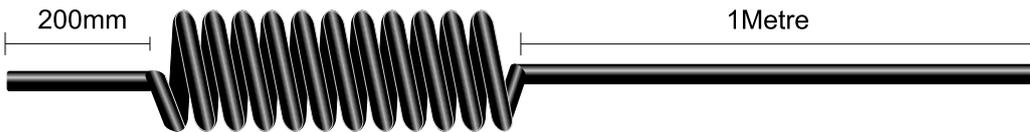

● Complies with AS2218

● Cable O.D: 8.8mm ● Coil O.D. 127mm ● Working length: 4.3M ● Total cable length: 6M ● 100VDC or 32VAC@15A max.



CL47

Unplugged long-tail coil.



CL47P

Plugged long-tail coil with 7pin D.I.N. metal truck plugs



CL47HD

Plugged long-tail coil with 7pin S.A.E. metal truck plugs



CL47X

Plugged long-tail coil with 7pin S.A.E. to 7pin D.I.N. plug.

Extendable / Pole trailer - 4mm auto 7 core short-tail



● Complies with AS2218

● Cable O.D: 8.8mm ● Coil O.D. 127mm ● Working length: 6M ● Total cable length: 8M ● 100VDC or 32VAC@15A max.

19638

Unplugged extended coil.

MOLDED SUZI-COILS

Hyrel sheathed electrical suzi-coils are extensively proven and high performance and supplied, typically, to truck O.E.Ms. Constructed with black Hyrel and Arnitel engineering rubbers ensures total waterproofing of coils when used with molded plugs. They have superior resistance to abrasion, ozone, grease, oils, chemicals and a wide operating temperature range. Other types available upon request. Part numbers in red are stocked items - part numbers in black are special buy in.

Extreme duty - unplugged short-tail



- Hyrel over-sheath ● Arnitel inner-sheath ● High abrasion resistance ● Grease and oil resistant ● Various working lengths

19612

Unplugged short-tail 25A coil.
7x25A (max) cores.
3M working length

19610

Unplugged short-tail 25A coil.
7x25A (max) cores.
8M working length.

Extreme duty - Plugged short-tail



- Molded pre-wired plugs ● One piece molded construction ● Water, dust, oil and greaseproof ● High abrasion resistance

19603

Plugged short-tail 60A coil
with 7pin D.I.N plugs.
2x60A, 3x25A,
2x15A (max) cores.
4.5M working length.

19611

Plugged short-tail 25A coil
with 7pin D.I.N plugs.
7x25A (max) cores.
3M working length.

19617

Plugged short-tail 60A coil
with 7pin D.I.N plugs.
1x60A, 1x40A, 3x25A
2x15A (max) cores.
4.5M working length.

Extreme duty - plugged long-tail



- Molded pre-wired plugs ● One piece molded construction ● Water, dust, oil and greaseproof ● High abrasion resistance

19609

Plugged long-tail 25A coil
with 7pin D.I.N plugs .
7x25A max.
3M working length.

19624

Plugged long-tail 25A coil
with 7pin S.A.E plugs .
7x25A max.
3M working length.

19616

Plugged long-tail 60A coil
with 7pin D.I.N plugs.
1x60A, 1x40A, 3x25A
2x15A max.
4M working length.

SPECIALITY COILS

Our curly-cords feature excellent memory and keep their shape longer. They are quality made in the EU to OEM specifications.
ABS/EBS suzi-coils are made from the same electrical coils used in our extreme duty range with EU made plugs.
Many other types available upon request.

Medium duty - Curly-cords



- High shape memory • Thick polyurethane over-sheath for durability •

19970

Unplugged curly-cord.
2x10A (max) cores.
6M working length.
25mm coil diameter.
Ideal as beacon extension cable.

19972

Unplugged curly-cord.
7x5A (max) cores.
2M working length.
20mm coil diameter.
Ideal for hand controllers.

**We have a huge range of coils available.
Call us with your requirements.**

Heavy duty - plugged EBS short-tail



- Pre-wired ABS plugs • Hytrel over-sheath for abrasion resistance • 40A rated

19606

Plugged short-tail EBS coil
with multi-fit 12 & 24V ABS plugs.
2x40A, 5x15A (max) cores.
70mm O.D. coil diameter.
3M working length.

