

2PIN CONNECTORS

General purpose sealed automotive connectors used extensively in engine, sensor and body systems. Female connector halves are commonly embedded into sensor r controlled unit.

MP150.02 connector has a one piece integral wire seal. The wire is fed through the seal and housing from the rear. The conductor is crimped onto the terminal and then pulled back into the housing. These are known as a "pull-to-seat" (PTS) terminal.

All other terminals using separate wire seals require the wire seal and conductor to be crimped to the terminal before insertion.



28215

Male MP150.2 (PTS) 2 circuit connector kit.
Dual bottom keys.



282123

Male MP150 2 circuit connector kit.
Centre key.



282121

Male MP150.2 (PTS) 2 circuit connector kit.
Dual bottom keys.




28212

Male MP280 2 circuit connector kit.
Top keys.
Suit 2-3mm auto / 0.5-1mm² CSA cable




282122

Male MP150.2 2 (PTS) circuit connector kit.
Dual mid keys.

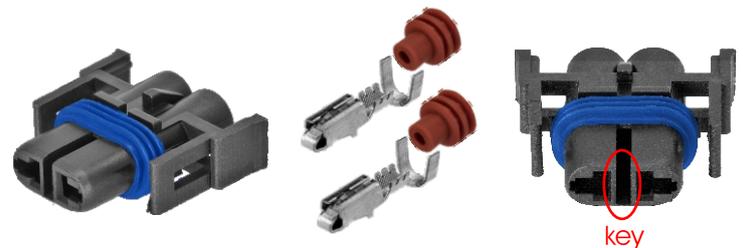

28221

Male MP280 2 circuit connector kit.
No TPA. Quick release tabs. Centre key.
Suit 2-3mm auto / 0.5-1mm² CSA cable

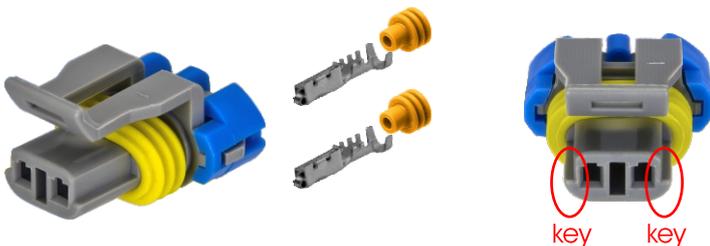


28216

Male MP150 2 circuit connector kit.
Dual bottom keys.



28217

Male MP150 2 circuit connector kit.
Centre key.

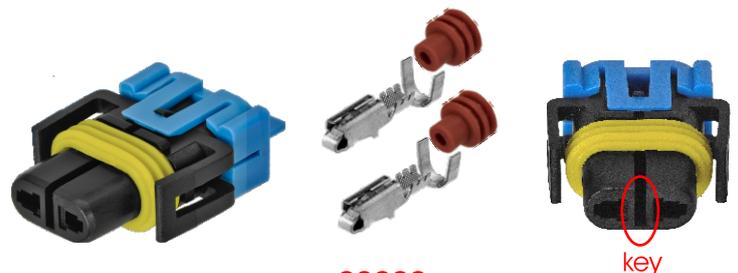

28222

Male MP280 2 circuit connector kit.
With TPA. Centre key.
Suit 2-3mm auto / 0.5-1mm² CSA cable

2PIN CONNECTORS

General purpose sealed automotive connectors used extensively in engine, sensor and body systems. Female connector halves are commonly embedded into sensor or controlled unit.

MP150.02 connector has a one piece integral wire seal. The wire is fed through the seal and housing from the rear. The conductor is crimped onto the terminal and then pulled back into the housing. These are known as a "pull-to-seat" (PTS) terminal.

All other terminals using separate wire seals require the wire seal and conductor to be crimped to the terminal before insertion.



28411

2 circuit connector kit.
Suit Bosch EV6 system.



28416

2 circuit connector kit.
Suit US Bosch EV6.



28453

2 circuit connector kit.
Suit Keihin fuel injectors.
Honda B & D series engines
after 1997 to current.




28412

2 circuit connector kit.
Suit Bosch EV1 low profile
fuel injectors and sensors.




28450

2 circuit connector kit.
Suit Sumotomo TS series.
Toyota coil and injector.



21301

2 circuit housing with quick
release locking spring.
Suit Bosch system.
JPT terminals.

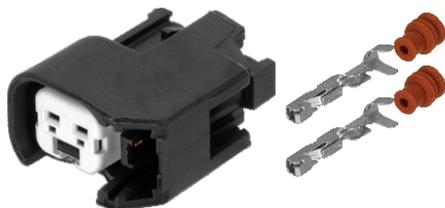

28413

2 circuit connector kit.
Suit US Bosch EV6.
Later model GM, Ford, Dodge.
Suits LS2/LS3/LS7/LS9.



28451

2 circuit connector kit.
Suit Delphi Micropack 064 series.
LS & Multec 2 injector connector.



21310

2 circuit connector kit.
Mates with 21301, 21312.



28417

2 circuit connector kit.
Older models with US Bosch EV6.
Suits LS2/LS3/LS7/LS9.



28452

2 circuit connector kit.
Suit Sumotomo HX series.
Injector and sensor applications.



21302

Boot suit 21301 and 21310
2 circuit housings.

2PIN CONNECTORS

General purpose sealed automotive connectors used extensively in engine, sensor and body systems. Female connector halves are commonly embedded into sensor or controlled unit.

MP150.02 connector has a one piece integral wire seal. The wire is fed through the seal and housing from the rear. The conductor is crimped onto the terminal and then pulled back into the housing. These are known as a "pull-to-seat" (PTS) terminal.

All other terminals using separate wire seals require the wire seal and conductor to be crimped to the terminal before insertion.



21314

2 circuit connector kit.
Suit AMP Econoseal system.
Nippondenso applications




181021

2 circuit MP280 connector kit.
High temperature ceramic housing.
Suits HB4/9006 halogen globes.
Single centre key.




21312

2 circuit MP280.1 (PTS) connector kit.
Suit U.S. Bosch system.
Pull-to-seat terminals.

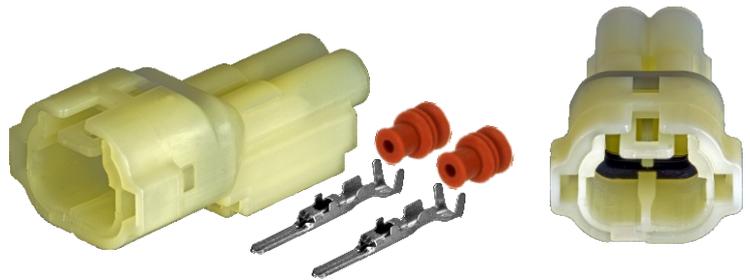

28457

2 circuit connector kit.
Suit Japanese vehicles.

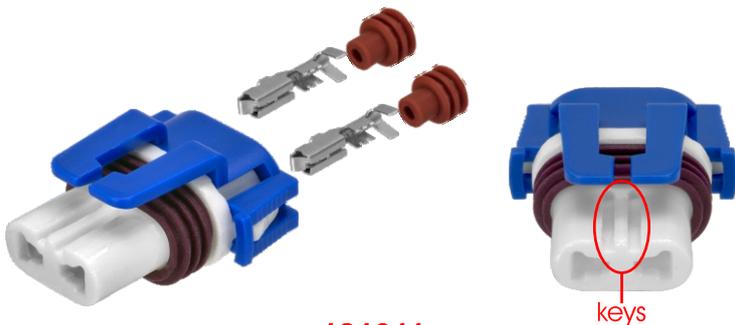

181011

2 circuit MP280 connector kit.
High temperature ceramic housing.
Suits HB3/9005 halogen globes.
Dual centre key.