

5-7PIN CONNECTORS

General purpose sealed automotive connectors used extensively in engine, sensor and body systems. Female connector halves are commonly embedded into sensor r controlled unit.

MP150.02 connector has a one piece integral wire seal. The wire is fed through the seal and housing from the rear. The conductor is crimped onto the terminal and then pulled back into the housing. These are known as a "pull-to-seat" (PTS) terminal.

All other terminals using separate wire seals require the wire seal and conductor to be crimped to the terminal before insertion.




28230

Male MP150.2 5 circuit connector kit.
Dual mid keys



28231

Male MP150.2 6 circuit connector kit.
Dual bottom keys

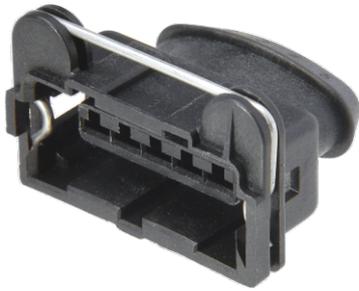

21307

5 circuit housing with locking spring.
Suit Bosch system.



21308

7 circuit housing with locking spring.
Suit Bosch system.



21304

Boot suit 21303, 21306, 21307
 housings